ProSafe lashing strap ratchet 3.5 m, 400 daN

Material no.: 1000000225 | Matchcode: PSH RA 3,5 | EAN code: 4045294195922

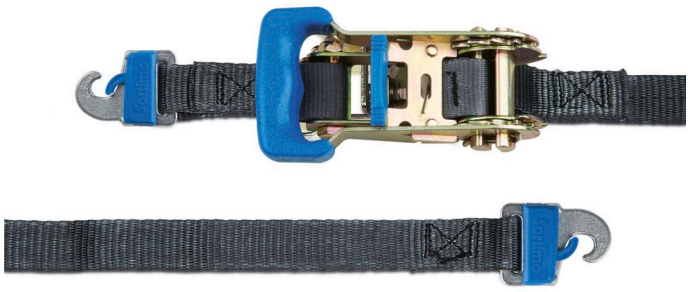

- Load capacity of up to 400 daN
- Strap width of 25 mm
- Quick access to freight
- Universal use in vehicles
- Provides for flexible load securing

Materials & Colour

Material(s):	PA6, Polyester, Steel
Color:	Anthracite

Dimensions

External dimensions:	3.525 x 63 x 35 mm
Length in mm:	3500

Technical details

Weight:	0,63 kg
Maximum tensile force in daN:	400

Accessories

	Material no.	Description	Matchcode	EAN code
	1000001870	Flexible edge protection lash.straps(4x)	ZFKS ZG VPE4	4045294230999
	1000003736	ProSafe CargoStopp	CST PS	4045294403072
	6000001231	ProSafe individual lashing point	EZ PS	4045294224646

Sortimo International GmbH
Dreilindenstraße 5 | 86441 Zusmarshausen | GERMANY
Tel. +49 8291 850488 | E-Mail: info@sortimo.com

ProSafe lashing strap ratchet 3.5 m, 400 daN

Material no.: 1000000225 | Matchcode: PSH RA 3,5 | EAN code: 4045294195922

	Material no.	Description	Matchcode	EAN code
	6000001259	ProSafe floor lashing point	BZ PS S	4045294225179
	6000001260	ProSafe floor lashing point restraint pole	BZ SP PS	4045294225186
	6000001116	Anti-rattle mat 750x500	ARM 750X500	4045294239565
	801014002	Anti-slip mat pallets 200x100 4pcs.	ZARM VPE4	4045294158828

Description

The ProSafe lashing strap with ratchet and a length of 3.5 m can be universally used in the vehicle and on the roof in conjunction with the Sortimo TopSystem. The ratchet enables higher clamping forces to be generated than would be possible with the clamp buckle. This lets you secure particularly heavy objects professionally and quickly. It is compatible with the integrated ProSafe from Sortimo's SR5 and Globelyst4 van racking systems, ProSafe lashing rails, SoboGrip ProSafe floor, individual lashing points, as well as with the vehicle manufacturer's original lashing points. The lashing strap has a load capacity of up to 400 daN and a width of 25 mm. The anti-rattle mat that can be cut to size (ref. no.: 6000003365) also prevents the load from sliding. An edge protection profile should be used to protect the lashing strap and the load.

Further information can be found here:

We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 16.09.2026

Sortimo International GmbH
Dreilindenstraße 5 | 86441 Zusmarshausen | GERMANY
Tel. +49 8291 850488 | E-Mail: info@sortimo.com