


ProSafe lashing belt 0.77 m

Material no.: 1000000228 | Matchcode: PSH PGA | EAN code: 4045294195953

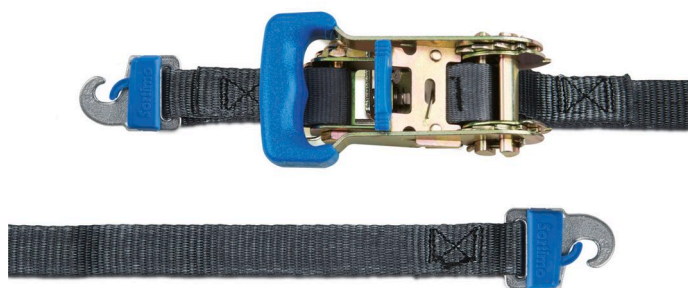

- » Strap width of 25 mm
- » Quicker access to freight
- » Universally applicable in vehicles
- » Enables flexible load securing
- » Simplified working through one-handed operation

Materials & Colour

Material(s):	PA6, Polyester, Steel
Color:	Anthracite




Dimensions

External dimensions:	864 x 63 x 35 mm
Length in mm:	770

Technical details





Weight:	0,50 kg
Maximum tensile force in daN:	400

Accessories

	Material no.	Description	Matchcode	EAN code
	801016208	small roof vent	DLS	4045294184728
	80721099	Roof vent	DL	4014599721099
	6000001283	round floor vent	BL RU	4045294225858

ProSafe lashing belt 0.77 m

Material no.: 1000000228 | Matchcode: PSH PGA | EAN code: 4045294195953

	Material no.	Description	Matchcode	EAN code
	1000001736	ProSafe individual lashing point restraint pole	EZ S PS	4045294228040
	1000001870	Flexible edge protection lash.straps(4x)	ZFKS ZG VPE4	4045294230999
	1000003736	ProSafe CargoStopp	CST PS	4045294403072
	6000001231	ProSafe individual lashing point	EZ PS	4045294224646

Description

The ProSafe lashing belt with a length of 0.77 m is specially designed for the securing of propane gas bottles with a diameter of 270 mm and is also for the Sortimo TopSystem ProSafe version. Belt is hooked-in to the individual lashing point or into the ProSafe lashing rails.

Can still be deployed universally in the vehicle. The ratchet enables a higher clamping force to be achieved as would be possible with the clamp buckle. This means you can secure heavy objects professionally. The anti-slip mat which can be cut to size (Ref. No.: 6000003365) additionally prevents the shifting of payloads. When it comes to payloads with sharp edges, an edge protection profile should be used to protect the lashing belt and the load.

Note: The authorities require vehicle ventilation with free openings when transporting gas bottles. For this purpose we provide a ventilation system in our original accessories programme, which can be used for both ventilation and extraction purposes.

Further information can be found here:



We reserve the right to make changes in the interest of technical progress, as well as correcting printing errors and mistakes. Pictures are similar, decorative material not included. With the publication of this data sheet, previous editions lose their validity. Version: 04.03.2026